C042481 - R.02

EZ8

	Rear Weight	Rated Operating Capacity*			⚠ Tipping Load ⚠		
		1	2	3	1	2	3
							
	**0 kg**	**1009 kg** 2224 lbs	**744 kg** 1640 lbs	**484 kg** 1067 lbs	**1261 kg** 2780 lbs	**930 kg** 2050 lbs	**605 kg** 1334 lbs
	180 kg 400 lbs	**1254 kg** 2764 lbs	**975 kg** 2149 lbs	**634 kg** 1397 lbs	**1567 kg** 3455 lbs	**1219 kg** 2687 lbs	**792 kg** 1746 lbs
	340 kg 750 lbs	**1442 kg** 3179 lbs	**1121 kg** 2471 lbs	**729 kg** 1600 lbs	**1802 kg** 3973 lbs	**1401 kg** 3089 lbs	**911 kg** 2008 lbs
	**0 kg**	**858 kg** 1891 lbs	**632 kg** 1394 lbs	**411 kg** 906 lbs	**1072 kg** 2363 lbs	**790 kg** 1742 lbs	**514 kg** 1133 lbs
	180 kg 400 lbs	**1066 kg** 2350 lbs	**829 kg** 1827 lbs	**538 kg** 1187 lbs	**1332 kg** 2937 lbs	**1036 kg** 2284 lbs	**673 kg** 1484 lbs
	340 kg 750 lbs	**1172 kg** 2584 lbs	**912 kg** 2011 lbs	**592 kg** 1305 lbs	**1465 kg** 3230 lbs	**1140 kg** 2513 lbs	**740 kg** 1631 lbs

REFER TO THE OPERATOR MANUAL FOR THE COMPREHENSIVE LOAD DIAGRAM. THE INDICATED VALUES INCLUDE THE WEIGHT OF THE ASSEMBLED PALLET FORK, SO THE NET VALUE IS THE VALUE SHOWN IN THE TABLE MINUS THE WEIGHT OF THE PALLET FORK.

* EN 474-3:2006 + A1:2009 - FORK APPLICATION

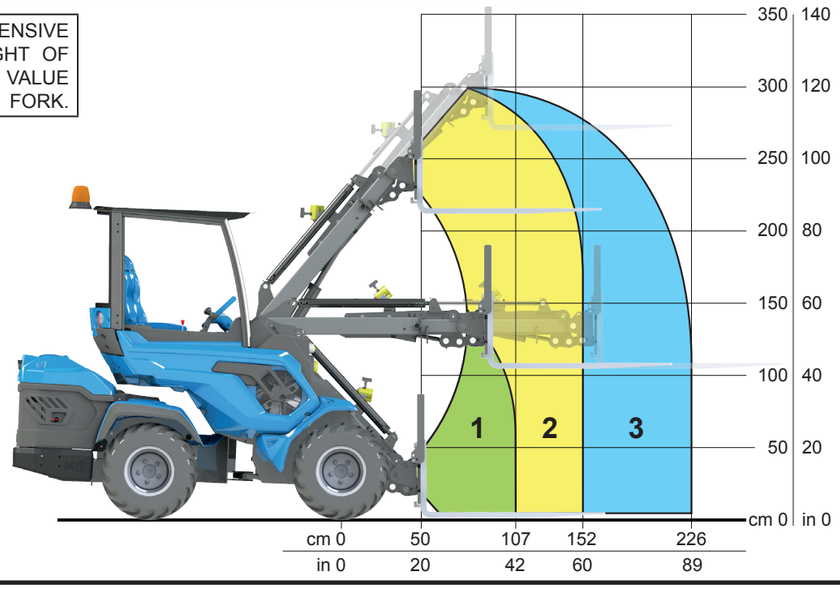

MULTI ONE